

# **KEN FORGING**

**Forged Industrial Hardware**

# **NUT EYEBOLTS**

**Available in 304 & 316 Stainless Steel**



- In Stock / Immediate Delivery
- No Minimums
- Plain and Shoulder Pattern
- Available Sizes:
  - Plain: 1/4" - 2" to 24" Length
  - Shoulder: 1/4" - 1-1/2" to 24" Length
- Other Materials Available in Stock:  
4140, Carbon - Hot Dip Galvanized
- Modifications Available Upon Request
- Full Domestic Certification Available Upon Request



**All Products Proudly  
Made in The USA**

**Toll-Free: 888-KEN-FORGING (536-3674) • Phone: 440-993-8091 • Fax: 440-992-0360  
www.KenForging.com • E-mail: sales@kenforging.com / info@kenforging.com**

# KEN FORGING

## Forged Industrial Hardware

### WHO WE ARE

The Leading **U.S.A.** Manufacturer Of Forged Industrial Hardware And Custom Forgings Since 1970

### MISSION STATEMENT

***"The Customer Is First"***

**Ken Forging, Inc. is committed to total customer satisfaction, achieving this goal by manufacturing products of a superior quality at competitive prices.**

We have set high standards for ourselves, with our customers in mind. We produce the best forged industrial hardware available, and do so in a timely manner. We attain these high standards by implementing and sustaining effective quality programs. We instill in our employees the belief that everyone within the company is responsible for the quality of our product, and the speed with which it is delivered to our customers. We will always strive to better ourselves and our products. Because of this, we continue to grow and lead the forged industrial hardware industry into the future.

### WHAT WE PROVIDE

#### **\$ VALUE-ADDED SERVICE**

- In Stock / Immediate Delivery
- No Minimums
- Competitive Pricing
- Quality with Full Traceability
- Technical Support
- Prompt Response on Inquiries, Quotations, and Orders
- Full Domestic Certification Available Upon Request
- Committed to Quality and Total Customer Satisfaction

### OUR FACILITY

260,000 Sq. Ft. Plant. Forge, Die Shop, Machining Department & Quality Department.

### OUR LOCATION

Jefferson, Ohio 65 miles East of Cleveland, OH  
40 miles West of Erie, PA




## Nut Eyebolts Plain Pattern

Drop Forged 304 Stainless Steel, Passivated & Electropolished  
 Each Threaded Eyebolt Includes One Stainless Steel Hex Nut Assembled

Stock No.	A Shank Dia. & Thread UNC-2A +.090/-0.030	B Shank Length +.060/-0	C Eye I.D. +.090/-0.030	D Eye O.D. +.090/-0.030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.
N2001-SS-4	1/4-20	4	1/2	1	2	500	0.10
N2001-SS-6	1/4-20	6	1/2	1	3	500	0.13
N2002-SS-2-1/4	5/16-18	2-1/4	5/8	1 1/4	1 1/2	800	0.13
N2002-SS-3-1/4	5/16-18	3-1/4	5/8	1 1/4	1 1/2	800	0.16
N2002-SS-4-1/4	5/16-18	4-1/4	5/8	1 1/4	2 1/2	800	0.18
N2002-SS-6	5/16-18	6	5/8	1 1/4	3	800	0.22
N2003-SS-2-1/2	3/8-16	2-1/2	3/4	1 1/2	1 1/2	1,200	0.20
N2003-SS-4-1/4	3/8-16	4-1/4	3/4	1 1/2	2	1,200	0.25
N2003-SS-6	3/8-16	6	3/4	1 1/2	3	1,200	0.30
N2003-SS-12-BLANK	3/8	12	3/4	1 1/2	Blank	N/A	0.50
N2003-SS-24-BLANK	3/8	24	3/4	1 1/2	Blank	N/A	0.89
N2005-SS-4-1/2	1/2-13	4-1/2	1	2	3	2,200	0.52
N2005-SS-6	1/2-13	6	1	2	3	2,200	0.60
N2005-SS-12	1/2-13	12	1	2	4	2,200	0.93
N2005-SS-24-BLANK	1/2	24	1	2	Blank	N/A	1.61
N2007-SS-6	5/8-11	6	1 3/8	2 1/2	3	3,500	0.99
N2007-SS-12	5/8-11	12	1 3/8	2 1/2	4	3,500	1.51
N2007-SS-24-BLANK	5/8	24	1 3/8	2 1/2	Blank	N/A	2.54
N2008-SS-6	3/4-10	6	1 1/2	2 13/16	3	5,200	1.53
N2008-SS-12	3/4-10	12	1 1/2	2 13/16	4	5,200	2.28
N2008-SS-24-BLANK	3/4	24	1 1/2	2 13/16	Blank	N/A	3.74
N2009-SS-6	7/8-9	6	1 3/4	3 1/2	3	7,200	2.65
N2009-SS-12	7/8-9	12	1 3/4	3 1/2	4	7,200	3.65
N2009-SS-24-BLANK	7/8	24	1 3/4	3 1/2	Blank	N/A	5.61
N2010-SS-6	1-8	6	2	4	3	10,000	3.77
N2010-SS-12	1-8	12	2	4	4	10,000	5.07
N2010-SS-24-BLANK	1	24	2	4	Blank	N/A	7.63
N2012-SS-6	1 1/4-7	6	2 3/16	4 7/16	3	13,500	5.65
N2012-SS-12	1 1/4-7	12	2 3/16	4 7/16	4	13,500	7.72
N2012-SS-24-BLANK	1 1/4	24	2 3/16	4 7/16	Blank	N/A	11.58
N2014-SS-6	1 1/2-6	6	2 1/2	5 3/16	3	20,000	8.92
N2014-SS-12	1 1/2-6	12	2 1/2	5 3/16	4	20,000	12.10
N2014-SS-24-BLANK	1 1/2	24	2 1/2	5 3/16	Blank	N/A	17.27

Blanks in stock (Not passivated or electropolished). Hex Nuts not included. Inquire for price.

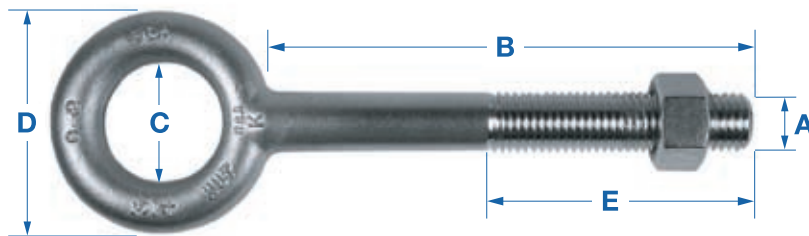


## Nut Eyebolts Shoulder Pattern

Drop Forged 304 Stainless Steel, Passivated & Electropolished  
 Each Threaded Eyebolt Includes One Stainless Steel Hex Nut Assembled

Stock No.	A Shank Dia. & Thread UNC-2A +.090/- .030	B Shank Length +.060/-0	C Eye I.D. +.090/- .030	D Eye O.D. +.090/- .030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.
N2021-SS-2	1/4-20	2	1/2	1	1 1/2	500	0.08
N2021-SS-4	1/4-20	4	1/2	1	2	500	0.11
N2021-SS-6-BLANK	1/4	6	1/2	1	Blank	N/A	0.16
N2022-SS-2-1/4	5/16-18	2 1/4	5/8	1 1/4	1 1/2	800	0.15
N2022-SS-4-1/4	5/16-18	4 1/4	5/8	1 1/4	2 1/2	800	0.19
N2022-SS-6	5/16-18	6	5/8	1 1/4	3	800	0.24
N2023-SS-2-1/2	3/8-16	2 1/2	3/4	1 1/2	1 1/2	1,200	0.24
N2023-SS-4-1/2	3/8-16	4 1/2	3/4	1 1/2	2	1,200	0.30
N2023-SS-6	3/8-16	6	3/4	1 1/2	3	1,200	0.35
N2023-SS-10	3/8-16	10	3/4	1 1/2	4	1,200	0.46
N2023-SS-12-BLANK	3/8	12	3/4	1 1/2	Blank	N/A	0.53
N2023-SS-24-BLANK	3/8	24	3/4	1 1/2	Blank	N/A	0.91
N2025-SS-3-1/4	1/2-13	3 1/4	1	2	2	2,200	0.52
N2025-SS-6	1/2-13	6	1	2	3	2,200	0.66
N2025-SS-12	1/2-13	12	1	2	4	2,200	1.00
N2025-SS-24-BLANK	1/2	24	1	2	Blank	N/A	1.66
N2027-SS-6	5/8-11	6	1 3/8	2 1/2	3	3,500	1.10
N2027-SS-12	5/8-11	12	1 3/8	2 1/2	4	3,500	1.63
N2027-SS-24-BLANK	5/8	24	1 3/8	2 1/2	Blank	N/A	2.67
N2028-SS-6	3/4-10	6	1 1/2	2 13/16	3	5,200	1.71
N2028-SS-12	3/4-10	12	1 1/2	2 13/16	4	5,200	2.45
N2028-SS-24-BLANK	3/4	24	1 1/2	2 13/16	Blank	N/A	3.92
N2029-SS-6	7/8-9	6	1 3/4	3 1/2	3	7,200	2.82
N2029-SS-12	7/8-9	12	1 3/4	3 1/2	4	7,200	3.85
N2029-SS-24-BLANK	7/8	24	1 3/4	3 1/2	Blank	N/A	5.80
N2030-SS-6	1-8	6	2	4	3	10,000	4.06
N2030-SS-12	1-8	12	2	4	4	10,000	5.38
N2030-SS-24-BLANK	1	24	2	4	Blank	N/A	8.16
N2032-SS-6	1 1/4-7	6	2 3/16	4 7/16	3	13,500	6.22
N2032-SS-12	1 1/4-7	12	2 3/16	4 7/16	4	13,500	8.29
N2032-SS-24-BLANK	1 1/4	24	2 3/16	4 7/16	Blank	N/A	12.15
N2034-SS-6	1 1/2-6	6	2 1/2	5 3/16	3	20,000	9.84
N2034-SS-12	1 1/2-6	12	2 1/2	5 3/16	4	20,000	12.67
N2034-SS-24-BLANK	1 1/2	24	2 1/2	5 3/16	Blank	N/A	18.65

Blanks in stock (Not passivated or electropolished). Hex Nuts not included. Inquire for price.

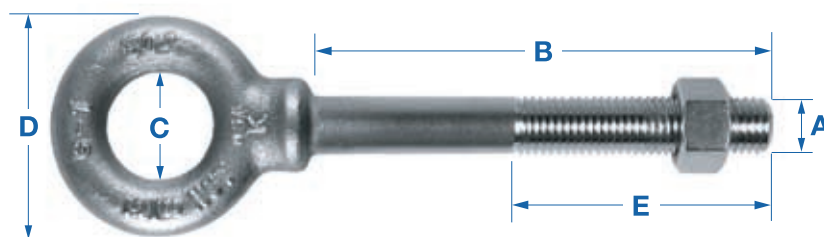


## Nut Eyebolts Plain Pattern

Drop Forged 316 Stainless Steel, Passivated & Electropolished  
 Each Threaded Eyebolt Includes One 316 Stainless Steel Hex Nut Assembled

Stock No.	A Shank Dia. & Thread UNC-2A +.090/- .030	B Shank Length +.060/-0	C Eye I.D. +.090/- .030	D Eye O.D. +.090/- .030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.
N2001-316SS-4	1/4-20	4	1/2	1	2	500	0.10
N2001-316SS-6	1/4-20	6	1/2	1	3	500	0.13
N2002-316SS-2-1/4	5/16-18	2-1/4	5/8	1-1/4	1-1/2	800	0.13
N2002-316SS-3-1/4	5/16-18	3-1/4	5/8	1-1/4	1-1/2	800	0.16
N2002-316SS-4-1/4	5/16-18	4-1/4	5/8	1-1/4	2-1/2	800	0.18
N2002-316SS-6	5/16-18	6	5/8	1-1/4	3	800	0.22
N2003-316SS-2-1/2	3/8-16	2-1/2	3/4	1-1/2	1-1/2	1,200	0.20
N2003-316SS-4-1/4	3/8-16	4-1/4	3/4	1-1/2	2	1,200	0.25
N2003-316SS-6	3/8-16	6	3/4	1-1/2	3	1,200	0.30
N2003-316SS-12-BLANK	3/8	12	3/4	1-1/2	Blank	N/A	0.50
N2003-316SS-24-BLANK	3/8	24	3/4	1-1/2	Blank	N/A	0.89
N2005-316SS-4-1/2	1/2-13	4-1/2	1	2	3	2,200	0.52
N2005-316SS-6	1/2-13	6	1	2	3	2,200	0.60
N2005-316SS-12	1/2-13	12	1	2	4	2,200	0.93
N2005-316SS-24-BLANK	1/2	24	1	2	Blank	N/A	1.61
N2007-316SS-6	5/8-11	6	1-3/8	2-1/2	3	3,500	0.99
N2007-316SS-12	5/8-11	12	1-3/8	2-1/2	4	3,500	1.51
N2007-316SS-24-BLANK	5/8	24	1-3/8	2-1/2	Blank	N/A	2.54
N2008-316SS-6	3/4-10	6	1-1/2	2-13/16	3	5,200	1.53
N2008-316SS-12	3/4-10	12	1-1/2	2-13/16	4	5,200	2.28
N2008-316SS-24-BLANK	3/4	24	1-1/2	2-13/16	Blank	N/A	3.74
N2009-316SS-6	7/8-9	6	1-3/4	3-1/2	3	7,200	2.65
N2009-316SS-12	7/8-9	12	1-3/4	3-1/2	4	7,200	3.65
N2009-316SS-24-BLANK	7/8	24	1-3/4	3-1/2	Blank	N/A	5.61
N2010-316SS-6	1-8	6	2	4	3	10,000	3.77
N2010-316SS-12	1-8	12	2	4	4	10,000	5.07
N2010-316SS-24-BLANK	1	24	2	4	Blank	N/A	7.63
N2012-316SS-6	1-1/4-7	6	2-3/16	4-7/16	3	13,500	5.65
N2012-316SS-12	1-1/4-7	12	2-3/16	4-7/16	4	13,500	7.72
N2012-316SS-24-BLANK	1-1/4	24	2-3/16	4-7/16	Blank	N/A	11.58
N2014-316SS-6	1-1/2-6	6	2-1/2	5-3/16	3	20,000	8.92
N2014-316SS-12	1-1/2-6	12	2-1/2	5-3/16	4	20,000	12.10
N2014-316SS-24-BLANK	1-1/2	24	2-1/2	5-3/16	Blank	N/A	17.27

Blanks in stock (Not passivated or electropolished). Hex Nuts not included. Inquire for price.

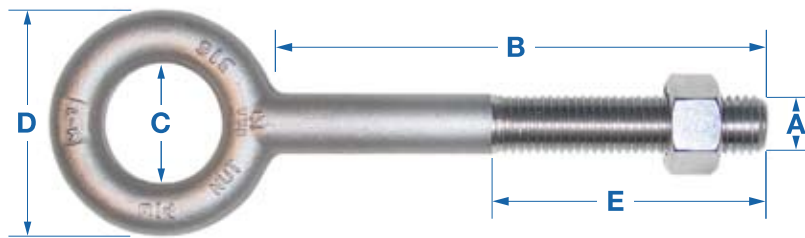


## Nut Eyebolts Shoulder Pattern

Drop Forged 316 Stainless Steel, Passivated & Electropolished  
 Each Threaded Eyebolt Includes One 316 Stainless Steel Hex Nut Assembled

Stock No.	A Shank Dia. & Thread UNC-2A +.090/-0.030	B Shank Length +.060/-0	C Eye I.D. +.090/-0.030	D Eye O.D. +.090/-0.030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.
N2021-316SS-2	1/4-20	2	1/2	1	1-1/2	500	0.08
N2021-316SS-4	1/4-20	4	1/2	1	2	500	0.11
N2021-316SS-6-BLANK	1/4	6	1/2	1	Blank	N/A	0.16
N2022-316SS-2-1/4	5/16-18	2-1/4	5/8	1-1/4	1-1/2	800	0.15
N2022-316SS-4-1/4	5/16-18	4-1/4	5/8	1-1/4	2-1/2	800	0.19
N2022-316SS-6	5/16-18	6	5/8	1-1/4	3	800	0.24
N2023-316SS-2-1/2	3/8-16	2-1/2	3/4	1-1/2	1-1/2	1,200	0.24
N2023-316SS-4-1/2	3/8-16	4-1/2	3/4	1-1/2	2	1,200	0.30
N2023-316SS-6	3/8-16	6	3/4	1-1/2	3	1,200	0.35
N2023-316SS-10	3/8-16	10	3/4	1-1/2	4	1,200	0.46
N2023-316SS-12-BLANK	3/8	12	3/4	1-1/2	Blank	N/A	0.53
N2023-316SS-24-BLANK	3/8	24	3/4	1-1/2	Blank	N/A	0.91
N2025-316SS-3-1/4	1/2-13	3-1/4	1	2	2	2,200	0.52
N2025-316SS-6	1/2-13	6	1	2	3	2,200	0.66
N2025-316SS-12	1/2-13	12	1	2	4	2,200	1.00
N2025-316SS-24-BLANK	1/2	24	1	2	Blank	N/A	1.66
N2027-316SS-6	5/8-11	6	1-3/8	2-1/2	3	3,500	1.10
N2027-316SS-12	5/8-11	12	1-3/8	2-1/2	4	3,500	1.63
N2027-316SS-24-BLANK	5/8	24	1-3/8	2-1/2	Blank	N/A	2.67
N2028-316SS-6	3/4-10	6	1-1/2	2-13/16	3	5,200	1.71
N2028-316SS-12	3/4-10	12	1-1/2	2-13/16	4	5,200	2.45
N2028-316SS-24-BLANK	3/4	24	1-1/2	2-13/16	Blank	N/A	3.92
N2029-316SS-6	7/8-9	6	1-3/4	3-1/2	3	7,200	2.82
N2029-316SS-12	7/8-9	12	1-3/4	3-1/2	4	7,200	3.85
N2029-316SS-24-BLANK	7/8	24	1-3/4	3-1/2	Blank	N/A	5.80
N2030-316SS-6	1-8	6	2	4	3	10,000	4.06
N2030-316SS-12	1-8	12	2	4	4	10,000	5.38
N2030-316SS-24-BLANK	1	24	2	4	Blank	N/A	8.16
N2032-316SS-6	1-1/4-7	6	2-3/16	4-7/16	3	13,500	6.22
N2032-316SS-12	1-1/4-7	12	2-3/16	4-7/16	4	13,500	8.29
N2032-316SS-24-BLANK	1-1/4	24	2-3/16	4-7/16	Blank	N/A	12.15
N2034-316SS-6	1-1/2-6	6	2-1/2	5-3/16	3	20,000	9.84
N2034-316SS-12	1-1/2-6	12	2-1/2	5-3/16	4	20,000	12.67
N2034-316SS-24-BLANK	1-1/2	24	2-1/2	5-3/16	Blank	N/A	18.65


Blanks in stock (Not passivated or electropolished). Hex Nuts not included. Inquire for price.

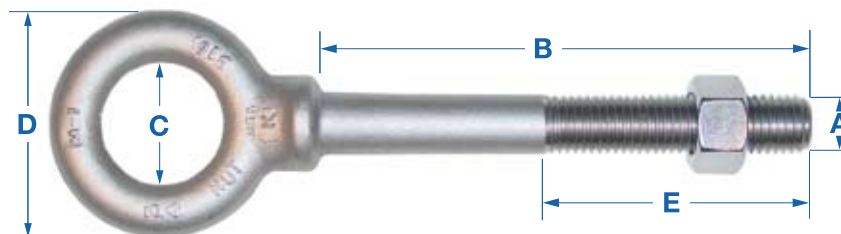

## Nut Eyebolts - Blank Plain Pattern

Drop Forged 4140 Alloy Steel, Self-Colored  
 Modified to Specifications at Additional Cost.

Stock No.	A Shank Dia. & Thread UNC-2A +.090/- .030	B Shank Length +.060/-0	C Eye I.D. +.090/- .030	D Eye O.D. +.090/- .030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.							
N2003-4140-12-BLANK	3/8	12	3/4	1 1/2	Blank	N/A	.50							
N2005-4140-12-BLANK	1/2	12	1	2	Blank	N/A	.90							
N2007-4140-12-BLANK	5/8	12	1 3/8	2 1/2	Blank	N/A	1.45							
N2008-4140-12-BLANK	3/4	12	1 1/2	2 13/16	Blank	N/A	2.24							
N2009-4140-12-BLANK	7/8	12	1 3/4	3 1/2	Blank	N/A </tr <tr> <td>N2010-4140-12-BLANK</td> <td>1</td> <td>12</td> <td>2</td> <td>4</td> <td>Blank</td> <td>N/A</td> <td>4.90</td> </tr>	N2010-4140-12-BLANK	1	12	2	4	Blank	N/A	4.90
N2010-4140-12-BLANK	1	12	2	4	Blank	N/A	4.90							

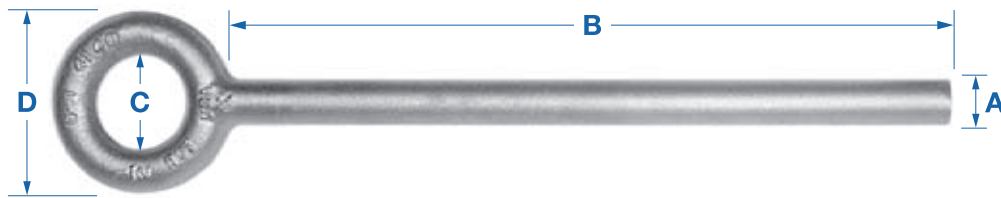

## Nut Eyebolts - Blank Shoulder Pattern

Drop Forged 4140 Alloy Steel, Self-Colored  
 Modified to Specifications at Additional Cost.

Stock No.	A Shank Dia. & Thread UNC-2A +.090/- .030	B Shank Length +.060/-0	C Eye I.D. +.090/- .030	D Eye O.D. +.090/- .030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.
N2023-4140-12-BLANK	3/8	12	3/4	1 1/2	Blank	N/A	.53
N2025-4140-12-BLANK	1/2	12	1	2	Blank	N/A	.96
N2027-4140-12-BLANK	5/8	12	1 3/8	2 1/2	Blank	N/A	1.57
N2028-4140-12-BLANK	3/4	12	1 1/2	2 13/16	Blank	N/A	2.39
N2029-4140-12-BLANK	7/8	12	1 3/4	3 1/2	Blank	N/A	3.68
N2030-4140-12-BLANK	1	12	2	4	Blank	N/A	5.28



## Nut Eyebolts Plain Pattern


Drop Forged Carbon Steel  
 Hot Dip Galvanized to ASTM A 153: UNC-2A **Before Galvanizing**  
 Each Threaded Eyebolt Includes One Galvanized Hex Nut Assembled

Stock No.	A Shank Dia. & Thread UNC-2A +.090/-0.030	B Shank Length +.060/-0	C Eye I.D. +.090/-0.030	D Eye O.D. +.090/-0.030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.
N2001-2*	1/4-20	2	1/2	1	1 1/2	500	0.07
N2001-3*	1/4-20	3	1/2	1	1 1/2	500	0.09
N2001-4*	1/4-20	4	1/2	1	2	500	0.10
N2001-5*	1/4-20	5	1/2	1	2 1/2	500	0.12
N2001-6*	1/4-20	6	1/2	1	3	500	0.13
N2002-2-1/4	5/16-18	2 1/4	5/8	1 1/4	1 1/2	800	0.13
N2002-3-1/4	5/16-18	3 1/4	5/8	1 1/4	1 1/2	800	0.16
N2002-4-1/4	5/16-18	4 1/4	5/8	1 1/4	2 1/2	800	0.18
N2002-5	5/16-18	5	5/8	1 1/4	2 1/2	800	0.20
N2002-6	5/16-18	6	5/8	1 1/4	3	800	0.22
N2003-2-1/2	3/8-16	2 1/2	3/4	1 1/2	1 1/2	1,200	0.20
N2003-3	3/8-16	3	3/4	1 1/2	1 1/2	1,200	0.21
N2003-4	3/8-16	4	3/4	1 1/2	2	1,200	0.25
N2003-4-1/2	3/8-16	4 1/2	3/4	1 1/2	3	1,200	0.26
N2003-5	3/8-16	5	3/4	1 1/2	3	1,200	0.27
N2003-6	3/8-16	6	3/4	1 1/2	3	1,200	0.30
N2003-8	3/8-16	8	3/4	1 1/2	4	1,200	0.36
N2003-10	3/8-16	10	3/4	1 1/2	4	1,200	0.42
N2003-12-BLANK	3/8	12	3/4	1 1/2	Blank	N/A	0.50
N2003-24-BLANK	3/8	24	3/4	1 1/2	Blank	N/A	0.89
N2005-2	1/2-13	2	1	2	1 5/8	2,200	0.39
N2005-3-1/4	1/2-13	3 1/4	1	2	2	2,200	0.46
N2005-4	1/2-13	4	1	2	3	2,200	0.49
N2005-4-1/2	1/2-13	4 1/2	1	2	3	2,200	0.52
N2005-6	1/2-13	6	1	2	3	2,200	0.60
N2005-8	1/2-13	8	1	2	4	2,200	0.71
N2005-10	1/2-13	10	1	2	4	2,200	0.82
N2005-12	1/2-13	12	1	2	4	2,200	0.93
N2005-18-BLANK	1/2	18	1	2	Blank	N/A	1.28
N2005-24-BLANK	1/2	24	1	2	Blank	N/A	1.61
N2007-4	5/8-11	4	1 3/8	2 1/2	3	3,500	0.82
N2007-4-1/2	5/8-11	4-1/2	1 3/8	2 1/2	3	3,500	0.86
N2007-6	5/8-11	6	1 3/8	2 1/2	3	3,500	0.99
N2007-8	5/8-11	8	1 3/8	2 1/2	4	3,500	1.14
N2007-10	5/8-11	10	1 3/8	2 1/2	4	3,500	1.34
N2007-12	5/8-11	12	1 3/8	2 1/2	4	3,500	1.51
N2007-15	5/8-11	15	1 3/8	2 1/2	6	3,500	1.73
N2007-18	5/8-11	18	1 3/8	2 1/2	6	3,500	2.00
N2007-24	5/8-11	24	1 3/8	2 1/2	6	3,500	2.55

\*Electro-galvanized

Blanks in stock (Hex Nuts not included). Inquire for price.

**Nut Eyebolts, Plain Pattern Carbon Continued on Next Page**

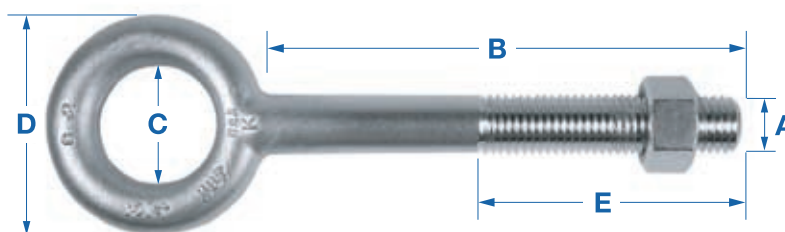




## Nut Eyebolts (Cont.) Plain Pattern

Drop Forged Carbon Steel  
 Hot Dip Galvanized to ASTM A 153: UNC-2A **Before Galvanizing**  
 Each Threaded Eyebolt Includes One Galvanized Hex Nut Assembled

Stock No.	A Shank Dia. & Thread UNC-2A +.090/-0.030	B Shank Length +.060/-0	C Eye I.D. +.090/-0.030	D Eye O.D. +.090/-0.030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.
N2008-4	3/4-10	4	1 1/2	2 13/16	3	5,200	1.27
N2008-4-1/2	3/4-10	4-1/2	1 1/2	2 13/16	3	5,200	1.34
N2008-6	3/4-10	6	1-1/2	2 13/16	3	5,200	1.53
N2008-8	3/4-10	8	1 1/2	2 13/16	4	5,200	1.77
N2008-10	3/4-10	10	1 1/2	2 13/16	4	5,200	2.03
N2008-12	3/4-10	12	1 1/2	2 13/16	4	5,200	2.28
N2008-15	3/4-10	15	1 1/2	2 13/16	6	5,200	2.61
N2008-18	3/4-10	18	1 1/2	2 13/16	6	5,200	2.98
N2008-24	3/4-10	24	1 1/2	2 13/16	6	5,200	3.75
N2009-5	7/8-9	5	1 3/4	3 1/2	3	7,200	2.46
N2009-6	7/8-9	6	1 3/4	3 1/2	3	7,200	2.65
N2009-8	7/8-9	8	1 3/4	3 1/2	4	7,200	2.92
N2009-10	7/8-9	10	1 3/4	3 1/2	4	7,200	3.29
N2009-12	7/8-9	12	1 3/4	3 1/2	4	7,200	3.65
N2009-18	7/8-9	18	1 3/4	3 1/2	6	7,200	4.62
N2009-24	7/8-9	24	1 3/4	3 1/2	6	7,200	5.67
N2010-6	1-8	6	2	4	3	10,000	3.77
N2010-8	1-8	8	2	4	4	10,000	4.17
N2010-10	1-8	10	2	4	4	10,000	4.63
N2010-12	1-8	12	2	4	4	10,000	5.07
N2010-15	1-8	15	2	4	6	10,000	5.66
N2010-18	1-8	18	2	4	6	10,000	6.33
N2010-24	1-8	24	2	4	6	10,000	7.70
N2012-6	1 1/4-7	6	2 3/16	4 7/16	3	13,500	5.65
N2012-8	1 1/4-7	8	2 3/16	4 7/16	4	13,500	6.25
N2012-12	1 1/4-7	12	2 3/16	4 7/16	4	13,500	7.72
N2012-18	1 1/4-7	18	2 3/16	4 7/16	6	13,500	9.72
N2012-24	1 1/4-7	24	2 3/16	4 7/16	6	13,500	11.88
N2014-6	1 1/2-6	6	2 1/2	5 3/16	3	20,000	8.92
N2014-12	1 1/2-6	12	2 1/2	5 3/16	4	20,000	12.10
N2014-18	1 1/2-6	18	2 1/2	5 3/16	6	20,000	15.22
N2014-24	1 1/2-6	24	2 1/2	5 3/16	6	20,000	17.80
N2016-12	2 4-1/2	12	3 1/4	6 7/8	4	35,000	25.80


\*Electro-galvanized

Blanks in stock (Hex Nuts not included). Inquire for price.

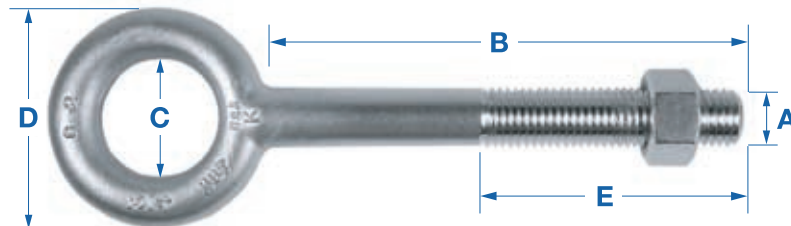

## Nut Eyebolts Shoulder Pattern

Drop Forged Carbon Steel  
 Hot Dip Galvanized to ASTM A 153: UNC-2A **Before Galvanizing**  
 Each Threaded Eyebolt Includes One Galvanized Hex Nut Assembled

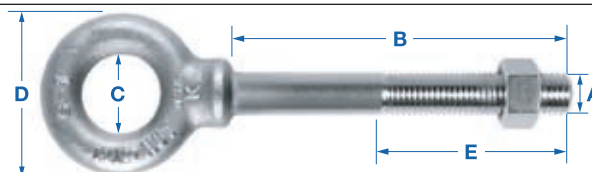

Stock No.	A Shank Dia. & Thread UNC-2A +.090/--.030	B Shank Length +.060/-0	C Eye I.D. +.090/--.030	D Eye O.D. +.090/--.030	E Thread Length +.060/-0	Rated Capty. Lbs.	Weight Lbs.
N2021-2*	1/4-20	2	1/2	1	1 1/2	500	0.08
N2021-4*	1/4-20	4	1/2	1	2	500	0.11
N2021-6-BLANK	1/4	6	1/2	1	Blank	N/A	0.16
N2022-2-1/4	5/16-18	2 1/4	5/8	1 1/4	1 1/2	800	0.15
N2022-4-1/4	5/16-18	4 1/4	5/8	1 1/4	2 1/2	800	0.19
N2022-6	5/16-18	6	5/8	1 1/4	3	800	0.24
N2023-2-1/2	3/8-16	2 1/2	3/4	1 1/2	1 1/2	1,200	0.24
N2023-4-1/2	3/8-16	4 1/2	3/4	1 1/2	2	1,200	0.30
N2023-6	3/8-16	6	3/4	1 1/2	3	1,200	0.35
N2023-12-BLANK	3/8	12	3/4	1 1/2	Blank	N/A	0.53
N2023-24-BLANK	3/8	24	3/4	1 1/2	Blank	N/A	0.91
N2025-2	1/2-13	2	1	2	1 5/8	2,200	0.44
N2025-3-1/4	1/2-13	3 1/4	1	2	2	2,200	0.52
N2025-4	1/2-13	4	1	2	3	2,200	0.54
N2025-6	1/2-13	6	1	2	3	2,200	0.66
N2025-12	1/2-13	12	1	2	4	2,200	1.00
N2025-18-BLANK	1/2	18	1	2	Blank	N/A	1.30
N2025-24-BLANK	1/2	24	1	2	Blank	N/A	1.66
N2027-4	5/8-11	4	1 3/8	2 1/2	3	3,500	0.94
N2027-4-1/2	5/8-11	4 1/2	1 3/8	2 1/2	3	3,500	0.98
N2027-6	5/8-11	6	1 3/8	2 1/2	3	3,500	1.10
N2027-8	5/8-11	8	1 3/8	2 1/2	4	3,500	1.28
N2027-10	5/8-11	10	1 3/8	2 1/2	4	3,500	1.46
N2027-12	5/8-11	12	1 3/8	2 1/2	4	3,500	1.63
N2027-15	5/8-11	15	1 3/8	2 1/2	6	3,500	1.88
N2027-18	5/8-11	18	1 3/8	2 1/2	6	3,500	2.14
N2027-24	5/8-11	24	1 3/8	2 1/2	6	3,500	2.68
N2028-4	3/4-10	4	1 1/2	2 13/16	3	5,200	1.45
N2028-4-1/2	3/4-10	4-1/2	1 1/2	2 13/16	3	5,200	1.52
N2028-6	3/4-10	6	1 1/2	2 13/16	3	5,200	1.71
N2028-8	3/4-10	8	1 1/2	2 13/16	4	5,200	1.95
N2028-10	3/4-10	10	1 1/2	2 13/16	4	5,200	2.20
N2028-12	3/4-10	12	1 1/2	2 13/16	4	5,200	2.45
N2028-15	3/4-10	15	1 1/2	2 13/16	6	5,200	2.80
N2028-18	3/4-10	18	1 1/2	2 13/16	6	5,200	3.17
N2028-24	3/4-10	24	1 1/2	2 13/16	6	5,200	3.93
N2029-5	7/8-9	5	1 3/4	3 1/2	3	7,200	2.65
N2029-6	7/8-9	6	1 3/4	3 1/2	3	7,200	2.82
N2029-8	7/8-9	8	1 3/4	3 1/2	4	7,200	3.15
N2029-12	7/8-9	12	1 3/4	3 1/2	4	7,200	3.85
N2029-24	7/8-9	24	1 3/4	3 1/2	6	7,200	5.80
N2030-6	1-8	6	2	4	3	10,000	4.06
N2030-9	1-8	9	2	4	4	10,000	4.70
N2030-12	1-8	12	2	4	4	10,000	5.38
N2030-24	1-8	24	2	4	6	10,000	7.99
N2032-6	1 1/4-7	6	2 3/16	4 7/16	3	13,500	6.22
N2032-8	1 1/4-7	8	2 3/16	4 7/16	4	13,500	6.82
N2032-12	1 1/4-7	12	2 3/16	4 7/16	4	13,500	8.29
N2032-24	1 1/4-7	24	2 3/16	4 7/16	6	13,500	12.45
N2034-6	1 1/2-6	6	2 1/2	5 3/16	3	20,000	9.84
N2034-12	1 1/2-6	12	2 1/2	5 3/16	4	20,000	12.67
N2034-24	1 1/2-6	24	2 1/2	5 3/16	6	20,000	18.65

\*Electro-galvanized  
 Blanks in stock (Hex Nuts not included). Inquire for price.

**Quote Number:** \_\_\_\_\_

## FORGExpress Quote Inquiry - Nut Eyebolts

Ken Forging Contact: \_\_\_\_\_

Date: \_\_\_\_\_

From: \_\_\_\_\_  
 Customer #: \_\_\_\_\_

Outside Sales Rep: \_\_\_\_\_

Company: \_\_\_\_\_

Phone: \_\_\_\_\_

Address: \_\_\_\_\_

Fax: \_\_\_\_\_

P.O.#: \_\_\_\_\_

Contact: \_\_\_\_\_

Your Part #: \_\_\_\_\_

Customer's Approval: **X** \_\_\_\_\_

**Special Modified/Custom Orders Can Not Be Returned**

- A Shank Diameter \_\_\_\_\_ +.090  
-.030
- B Shank Length \_\_\_\_\_ +.060  
-.000
- C Eye Inside Diameter (ID) \_\_\_\_\_ +.090  
-.030
- D Eye Outside Diameter (OD) \_\_\_\_\_ +.090  
-.030
- E Threaded Length \_\_\_\_\_ +.060  
-.000

Note: Dimensional tolerances listed are in inches unless otherwise noted.

Hex Nut:  Included  Not Included

Thread Type: \_\_\_\_\_ UNC-2A\* \_\_\_\_\_ UNF-2A\*  
\*UN-2A Fit Before Plating

Other: \_\_\_\_\_


Right Hand Thread  Left Hand Thread

**Material:**

- C1030/C1035  304 Stainless
- 4140 Alloy  316 Stainless
- Other: \_\_\_\_\_

**Certification:**

- C of C  Cert. Test Report
- Material Cert.  Plating Cert.
- Other: \_\_\_\_\_

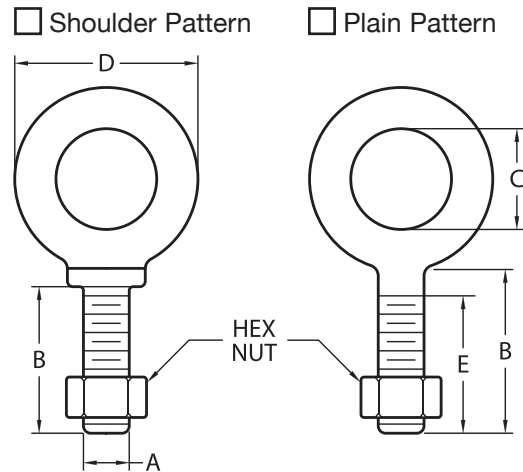

Note: These Eyebolts are "As-Forged" and have not been heat treated. This product has been tested and proved to meet the following Rated Capacity: \_\_\_\_\_

**Plating:\***

- Galvanized  Passivate
- Zinc  Electropolish
- Black Oxide
- Other: \_\_\_\_\_

\*UN-2A Fit Before Plating

Permissible Quantity Variation		
Quantity	Over	Under
1-99	10%	3%
100-999	5%	3%
1000+	3%	3%

**Exact Quantity Requested\***  
\* Exact Quantity Request may affect Cost/Each

**Please Quote the Following:**

Quantity	Cost/Each
_____	\$ _____
_____	\$ _____
_____	\$ _____
_____	\$ _____

**Price Quoted Applies to Above Quantities Only**

Pricing valid through \_\_\_\_\_

**Lead Time: \_\_\_\_\_ Working Days**

Note: Pricing & Availability Reflects Steel Pricing & Availability at Time of Order

**Additional Requirements/Comments:**  
 \_\_\_\_\_  
 \_\_\_\_\_

**Quote Form - Nut Eyebolts**

For a complete catalog, please visit our website at [www.KenForging.com](http://www.KenForging.com)  
or call us toll free at 1-888-KEN-FORGING (536-3674).



Committed to Quality and Total Customer Satisfaction

**KEN FORGING**

1049 Griggs Road • Box 277 • Jefferson, Ohio 44047

Toll-Free: 888-KEN-FORGING (536-3674) • Phone: 440-993-8091 • Fax: 440-992-0360  
[www.KenForging.com](http://www.KenForging.com) • E-mail: [sales@kenforging.com](mailto:sales@kenforging.com) / [info@kenforging.com](mailto:info@kenforging.com)